



Roll up sign

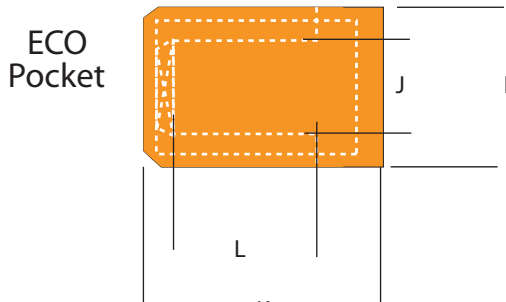

Pocket material 4 ply construction
 Non Reflective Flourescent Vinly
 Fabric reinforced UV stabalized vinyl
 16 oz per sq yd
 Break strength Warp 200 lbs. min.
 Break strength Fill 200 lbs. m
 Pocket placement can be adjusted to fit
 any bracing system notify JBC prior to
 fabrication. Standard is set fo 64.375" braces

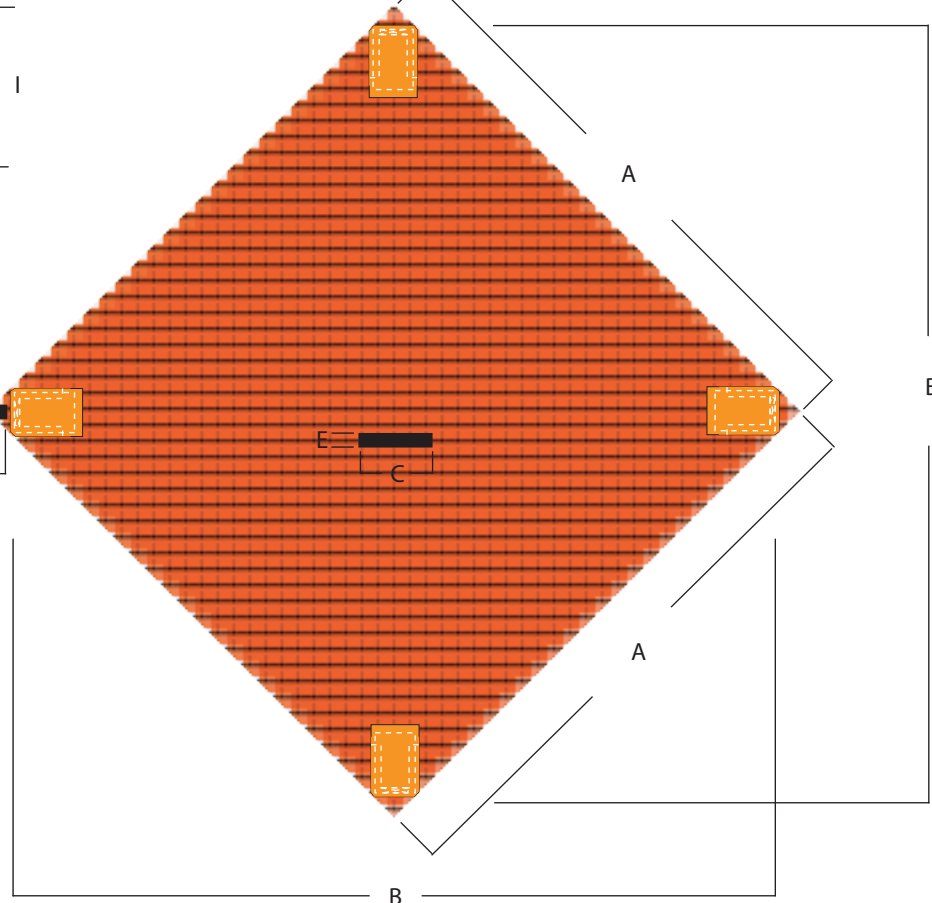


DIMENSIONS

A	48.00"
B	67.8822"
C	6.00"
D	16.00"
E	1.00"
F	64.375"
G	1.25"
H	.1875" Thickness
I	3.125"
J	1.75"
K	4.50"
L	2.75"
M	
N	
O	

Sign material
 Non Reflective Flourescent Red- Orange Mesh
 16 oz per sq ft
 Double weave material makes piking unnecessaty
 Twitchell product T80 AQS 011

Braces with clamp

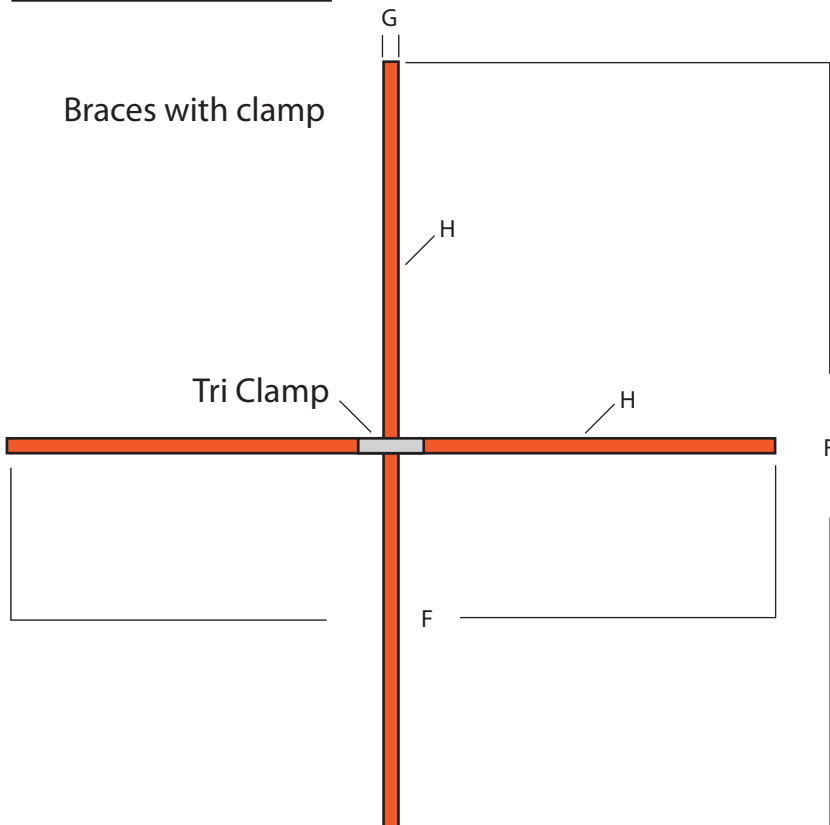

	48" ROLL UP SIGN STITCHED POCKETS Non Reflective Mesh	
	JBC SAFETY PLASTIC INC. 710 Nogales St Industry Ca 91748	
Date 5/28/09		DWG. NO. RUSTECO