



# Roll up sign

## ECO Pocket

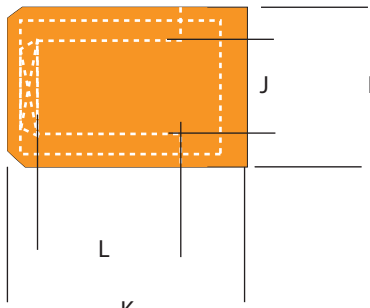

Pocket material 3 ply construction  
 Non Reflective Fluorescent Vinyl  
 Fabric reinforced UV stabilized vinyl  
 16 oz per sq yd  
 Break strength Warp 200 lbs. min.  
 Break strength Fill 200 lbs. m  
 Pocket placement can be adjusted to fit  
 any bracing system notify JBC prior to  
 fabrication. Standard is set for 64.375" braces

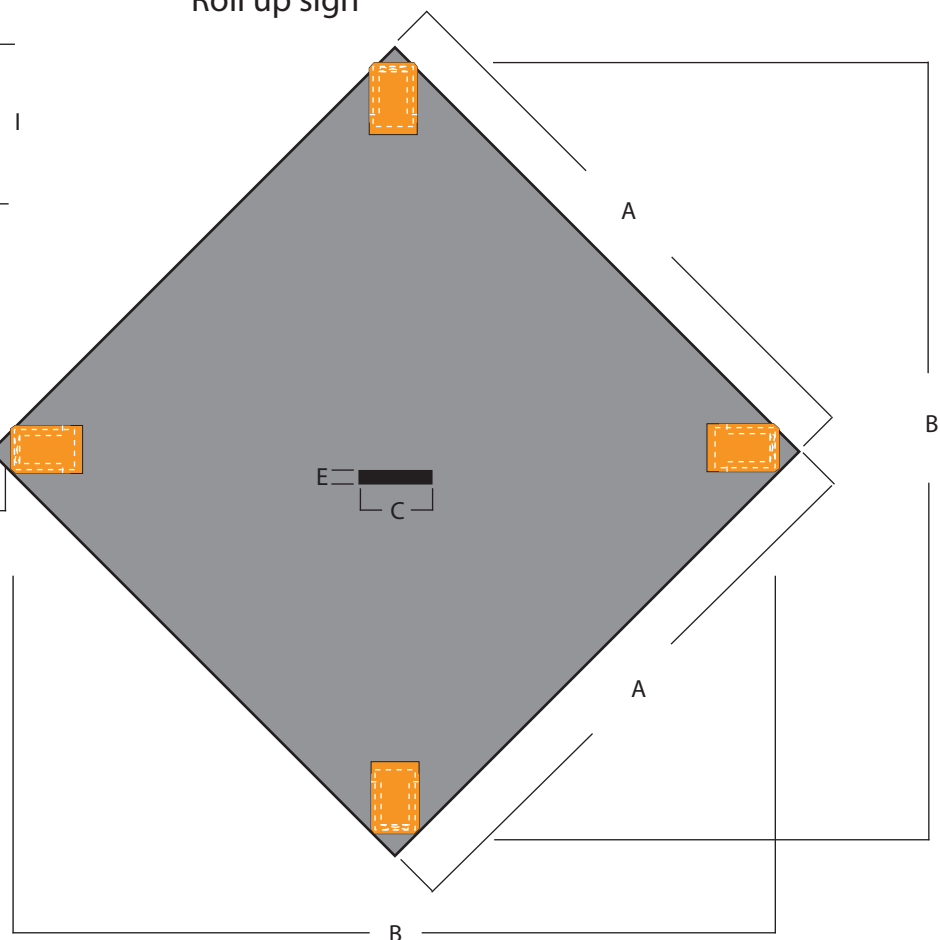


### DIMENSIONS

A	48.00"
B	67.8822"
C	6.00"
D	16.00"
E	1.00"
F	64.375"
G	1.25"
H	.1875" Thickness
I	3.125"
J	1.75"
K	4.50"
L	2.75"
M	
N	
O	

Sign material  
 Non Reflective Fluorescent Red- Orange Mesh  
 16 oz per sq ft  
 Double weave material makes piking unnecessary  
 Twitchell product T80 AQS 011

## Braces with clamp

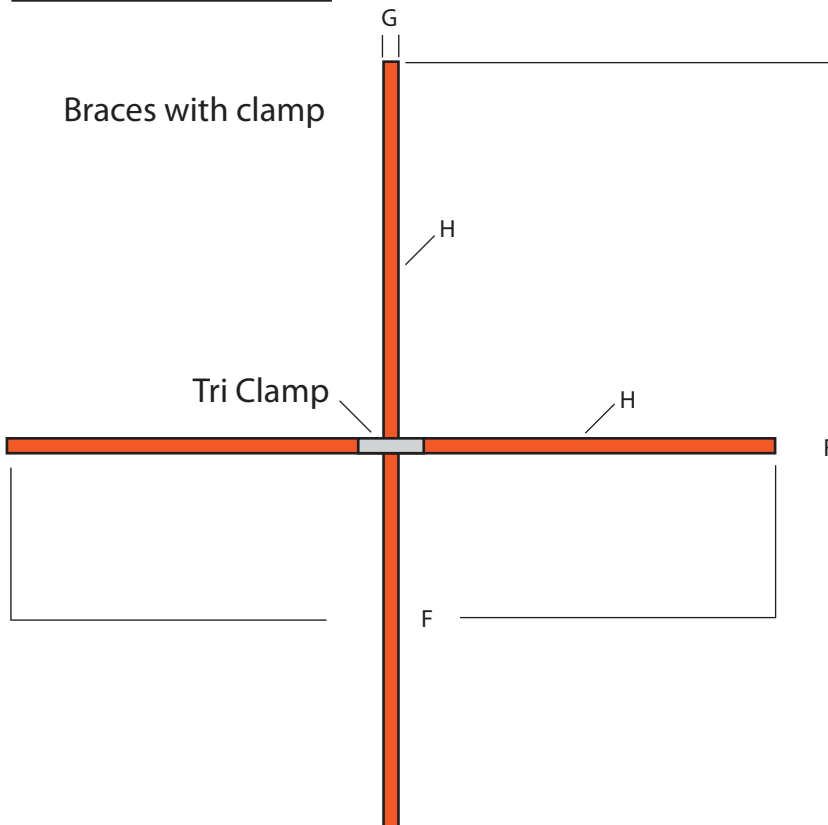

	<b>48" ROLL UP SIGN</b> <b>STITCHED POCKETS</b> Standard Non Reflective Mesh/Vinyl	
	JBC SAFETY PLASTIC INC. 710 Nogales St Industry Ca 91748	
Date 5/28/09		DWG. NO. RUSTECO