


Roll up sign


ECO Pocket

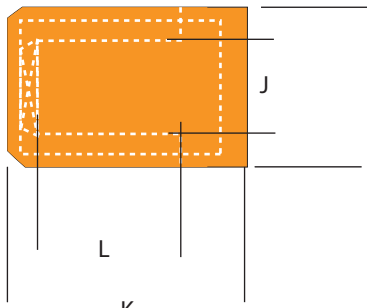

Pocket material 3 ply construction
 Non Reflective Fluorescent Vinyl
 Fabric reinforced UV stabilized vinyl
 16 oz per sq yd
 Break strength Warp 200 lbs. min.
 Break strength Fill 200 lbs. m
 Pocket placement can be adjusted to fit
 any bracing system notify JBC prior to
 fabrication. Standard is set fo 64.375" braces


DIMENSIONS

A	48.00"
B	67.8822"
C	6.00"
D	16.00"
E	1.00"
F	64.375"
G	1.25"
H	.1875" Thickness
I	3.125"
J	1.75"
K	4.50"
L	2.75"
M	
N	
O	

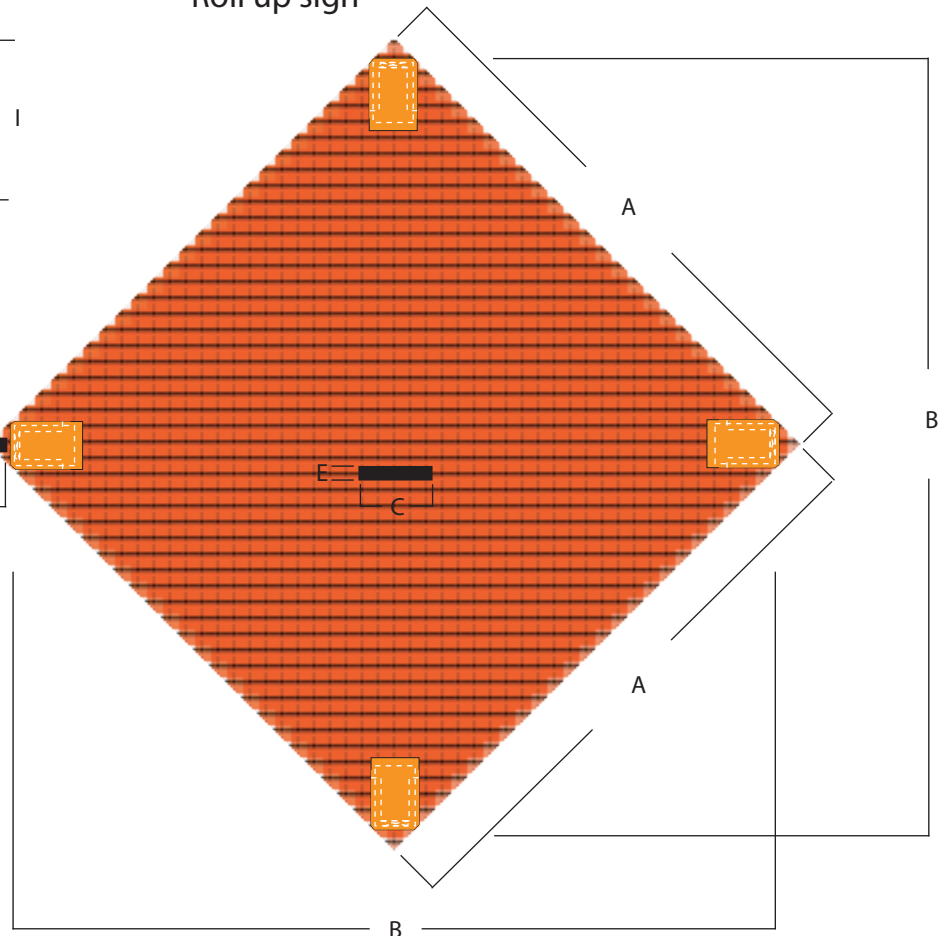

Sign material
 Non Reflective Fluorescent Red- Orange Mesh
 16 oz per sq ft
 Double weave material makes piking unnecessary
 Twitchell product T80 AQS 011

Braces with clamp

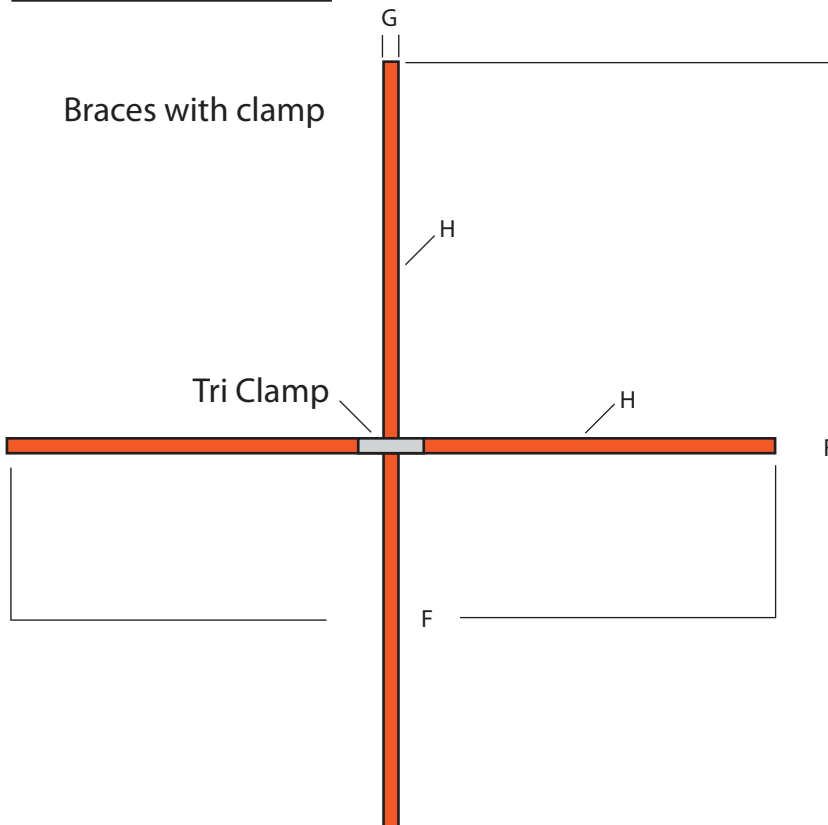

	48" ROLL UP SIGN STITCHED POCKETS Standars Non Reflective Mesh	
	JBC SAFETY PLASTIC INC. 710 Nogales St Industry Ca 91748	
Date 5/28/09		DWG. NO. RUSTECO